

# Q.TRON XL-G2 SERIES



610 - 635 Wp | 156 Cells  
22.7% Maximum Module Efficiency

MODEL Q.TRON XL-G2.3/BFG



Q.ANTUM  
NEO

## High performance Qcells N-type solar cells

Q.ANTUM NEO Technology with optimized module layout boosts module efficiency up to 22.7%.



## Bifacial energy yield gain of up to 21%

Bifacial Q.ANTUM NEO solar cells make efficient use of light shining on the module rear-side for radically improved LCOE.



## A reliable investment

Double glass module design enables extended lifetime with 12-year product warranty and improved 30-year performance warranty<sup>1</sup>.



## Enduring high performance

Long-term yield security with Anti LeTID and Anti PID Technology<sup>2</sup>, Hot-Spot Protect.



## Frame for versatile mounting options

High-tech aluminum alloy frame protects from damage, enables use of a wide range of mounting structures and is certified regarding IEC for high snow (5400 Pa) and wind loads (3750 Pa)<sup>3</sup>.



## Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behavior.

<sup>1</sup> See data sheet on rear for further information.

<sup>2</sup> APT test conditions according to IEC/TS 62804-1:2015 method B (-1500 V, 168 h) including post treatment according to IEC 61215-1-1 Ed. 2.0 (CD)

<sup>3</sup> See Installation Manual for instructions

The ideal solution for:




Ground mounted solar panels



# Q.TRON XL-G2 SERIES

## Mechanical Specification

Format	96.9 in × 44.6 in × 1.38 in (including frame) (2462 mm × 1134 mm × 35 mm)
Weight	78.0 lbs (35.4 kg)
Front Cover	0.08 in (2.0 mm) thermally pre-stressed glass with anti-reflection technology
Back Cover	0.08 in (2.0 mm) semi-tempered glass
Frame	Anodised aluminium
Cell	6 × 26 monocrystalline Q.ANTUM NEO solar half cells
Junction box	2.09-3.98 × 1.26-2.36 × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm), Protection class IP68, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥ 29.5 in (750 mm), (-) ≥ 13.8 in (350 mm)
Connector	Stäubli MC4-Evo2 ; IP68

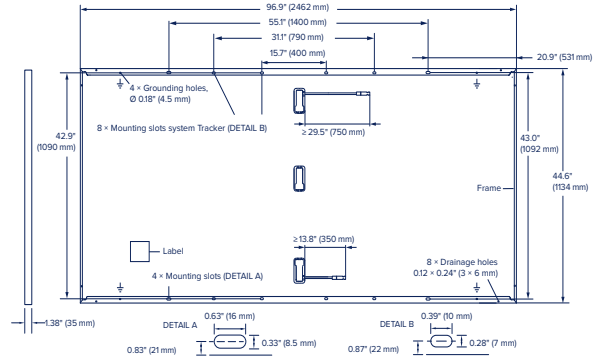

## Electrical Characteristics

POWER CLASS		610		615		620		625		630		635			
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5W/-0W)															
Minimum	Power at MPP <sup>1</sup>	$P_{MPP}$	[W]	610	675.4	615	681.0	620	686.5	625	692.0	630	697.6	635	703.1
	Short Circuit Current <sup>1</sup>	$I_{SC}$	[A]	13.65	15.13	13.71	15.19	13.76	15.25	13.82	15.31	13.88	15.38	13.93	15.44
	Open Circuit Voltage <sup>1</sup>	$V_{OC}$	[V]	56.11	56.34	56.39	56.62	56.67	56.90	56.95	57.18	57.23	57.46	57.51	57.74
	Current at MPP	$I_{MPP}$	[A]	12.95	14.34	13.00	14.40	13.05	14.46	13.10	14.51	13.15	14.57	13.21	14.62
	Voltage at MPP	$V_{MPP}$	[V]	47.10	47.09	47.30	47.29	47.50	47.49	47.70	47.69	47.89	47.88	48.09	48.08
	Efficiency <sup>1</sup>	$\eta$	[%]	≥ 21.8		≥ 22.0		≥ 22.2		≥ 22.4		≥ 22.6		≥ 22.7	

Bifaciality of  $P_{MPP}$  and  $I_{SC}$  80% ± 5% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


<sup>1</sup>Measurement tolerances  $P_{MPP}$  ± 3%;  $I_{SC}$ ,  $V_{OC}$  ± 5% at STC: 1000 W/m<sup>2</sup>; \*at BSTC: 1000 W/m<sup>2</sup> +  $\phi$  × 135 W/m<sup>2</sup>,  $\phi$  = 80%, 25 ± 2°C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT<sup>2w</sup>

Minimum	Power at MPP	$P_{MPP}$	[W]	461.1	464.9	468.7	472.5	476.2	480.0
	Short Circuit Current	$I_{SC}$	[A]	11.00	11.05	11.09	11.14	11.18	11.23
	Open Circuit Voltage	$V_{OC}$	[V]	53.24	53.51	53.77	54.04	54.31	54.58
	Current at MPP	$I_{MPP}$	[A]	10.18	10.22	10.26	10.30	10.34	10.38
	Voltage at MPP	$V_{MPP}$	[V]	45.28	45.48	45.67	45.86	46.05	46.24

<sup>2</sup>800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5

## Qcells PERFORMANCE WARRANTY

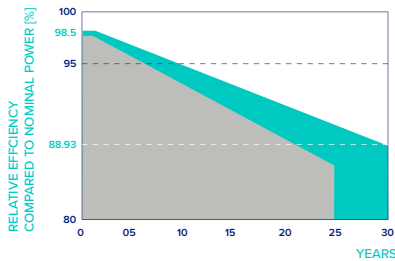


At least 98.5% of nominal power during first year. Thereafter max. 0.33% degradation per year. At least 95.53% of nominal power up to 10 years. At least 88.93% of nominal power up to 30 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

<sup>\*</sup>Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

## PERFORMANCE AT LOW IRRADIANCE

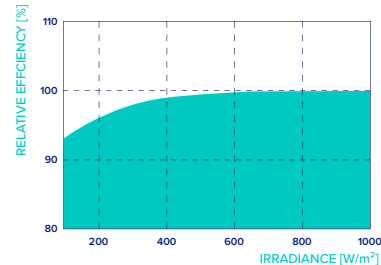

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m<sup>2</sup>).

## TEMPERATURE COEFFICIENTS

Temperature Coefficient of $I_{SC}$	$\alpha$	[%/K]	+0.04	Temperature Coefficient of $V_{OC}$	$\beta$	[%/K]	-0.24
Temperature Coefficient of $P_{MPP}$	$\gamma$	[%/K]	-0.30	Nominal Module Operating Temperature	NMOT	[°F]	109 ± 5.4 (43 ± 3°C)

## Properties for System Design

Maximum System Voltage	$V_{SYS}$	[V]	1500	PV module classification	Class II
Maximum Series Fuse Rating	[A DC]	30	Fire Rating based on ANSI/UL 61730	TYPE 29 <sup>†</sup>	
Max. Push Load <sup>3</sup> , Test/Design	[lbs/ft <sup>2</sup> ]	113 (5400 Pa)/75 (3600 Pa)	Permitted Module Temperature on Continuous Duty	-40°F up to +185°F (-40°C up to +85°C)	
Max. Pull Load <sup>3</sup> , Test/Design	[lbs/ft <sup>2</sup> ]	78 (3750 Pa)/52 (2500 Pa)			

<sup>3</sup> See Installation Manual for instructions

<sup>4</sup> New Type is similar to Type 3 but with metallic frame

## Qualifications and Certificates

UL 61730-1 & UL 61730-2, CE-compliant,  
Quality Controlled PV - TÜV Rheinland,  
IEC 61215:2016, IEC 61730:2016,  
U.S. Patent No. 9,893,215(solar cells)



\* Contact your Qcells Sales Representative for details regarding the module's eligibility to be Buy American Act (BAA) compliant.

Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.  
Qcells North America 300 Spectrum Center Drive, Suite 500, Irvine, CA 92618, USA | TEL +1 (949)748-5996 | EMAIL na.support@qcells.com | WEB www.qcells.com/us



Find product recycling details at QR code above

qcells