


Q.HOME CORE

Residential Energy Storage Solution



H3S/H7S : DC or AC-coupled

MODEL Q.VOLT H3.8/7.6SX | Q.SAVE D10.0/15.0/20.0SX | Q.HOME HUB 200SX

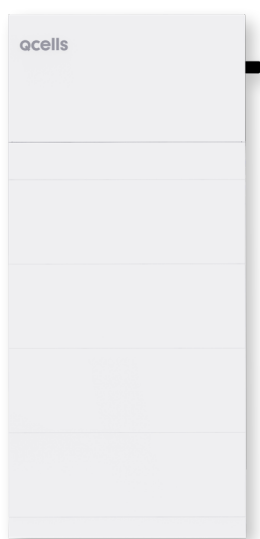

Q.VOLT & Q.SAVE



Q.HOME HUB

Better Energy. One Powerful Partner.

Security that protects against uncertainty. Power you can rely on. Design that scales to your needs.



Peace of Mind

One Brand. One Warrantor. Backed by Qcells' inclusive 12 years standard product warranty (extendable to 15 years) on Q.HOME CORE components, with best-in-class customer support.



Smart Design and Scalable Solutions

Parallel stacking so you can scale the system to the size your home needs.



Simplified Installation and Commissioning

Smart commissioning via a web browser or mobile app, and remote diagnostics for issue resolution.



Compact Design and Sleek Appeal

Save floor space with a single battery and inverter integrated into one tower with a modern, very thin profile.



Safety and Reliability

2023/2020 NEC rapid shutdown compliant system with integrated PLC transmitter.



Ideal Complete Solution to Fit Your Lifestyle

Q.VOLT, Q.SAVE and Q.HOME HUB pair perfectly with Qcells' #1 residential solar panels* for a full suite of clean energy solutions for any home.

*Wood Mackenzie U.S. PV Leaderboard for 16 consecutive quarters in the residential segment.

Q.HOME CORE

Q.VOLT H3.8/7.6SX



- Up to 200% oversizing allowed
- Up to 3 MPPTs
- Maximum 16 A PV input current
- Microgrid supported
- Peak efficiency: 98%
- Integrated arc fault protection and rapid shutdown transmitter

Q.SAVE D10.0/15.0/20.0SX

- Long life & safe LFP battery
- Up to four 5 kWh stackable batteries, 20 kWh maximum
- Modular design & quick installation
- Floor or wall mounted

Q.HOME HUB 200SX



- Maximum 200 A AC current
- Flexible home backup
- Built-in energy management meter

■ Q.VOLT H3.8/7.6SX

| | | Q.VOLT H3.8SX | Q.VOLT H7.6SX |
|---|---------|--|-------------------------------|
| INPUT PV | | | |
| Maximum PV power | [W] | 7600 | 15200 |
| Max DC Power Input* | [W] | 5700 | 11400 |
| Maximum DC voltage | [V] | | 550 |
| Nominal DC operating voltage | [V] | | 360 |
| Maximum input current | [A] | A: 16/B: 16 | A: 16/B: 16/C: 16 |
| Maximum short circuit current | [A] | A: 20/B: 20 | A: 20/B: 20/C: 20 |
| MPPT voltage range | [V] | | 90 to 500 |
| Start input voltage | [V] | | 120 |
| No. of MPP trackers, Strings per MPP tracker | | 2, 1 | 3, 1 |
| DC disconnection switch | | | YES |
| * Maximum usable PV energy to inverter and battery. | | | |
| INPUT / OUTPUT AC | | | |
| Nominal AC power | [VA] | 3816 | 7608 |
| Maximum continuous AC power | [VA] | 3816 | 7608 |
| Nominal AC voltage / Nominal AC frequency | [V/Hz] | | 240/60 |
| Maximum continuous AC current | [A] | 15.9 | 31.7 |
| Output power factor rating | | | >0.99, ±0.8 leading / lagging |
| Total harmonic distortion (THD, rated power) | [%] | | < 3 |
| INPUT / OUTPUT BATTERY | | | |
| Battery type | | | Li-ion (LFP) |
| Maximum output power | [W] | 3816 | 7600 |
| Maximum charge / discharge current | [A] | | 54 |
| Reverse-polarity protection | | | YES |
| Cycle efficiency charging to discharging | [%] | 88.5 | 92.5 |
| ADDITIONAL FEATURES | | | |
| AFCI | | | YES |
| Rapid shutdown transmitter | | Integrated PLC Rapid Shutdown Transmitter *Compatible with Qcells RSD-D Receivers | |
| EFFICIENCY | | | |
| CEC weighted efficiency | [%] | | 97.50 |
| Maximum inverter efficiency | [%] | | 98.00 |
| POWER CONSUMPTION | | | |
| Internal consumption (night) | [W] | | < 3 |
| STANDARD | | | |
| Safety | | UL1741-SB, 3rd edition, PCS-import only, UL1699B, CSA – C22.2 IEEE 1547-2018 *This product is UL Listed as PV rapid shutdown equipment and conforms with NEC 2020, and NEC 2023 section 690.12 and C22.1-2018 Rule 64-218 rapid shutdown of PV Systems, for AC and DC conductors, when installed according to the instructions. | |
| Emissions | | FCC Part 15 Class B | |
| Grid connection standards | | CA Rule 21, Rule 14 (H) | |
| Revenue grade metering | | ANSI C12.20 | |
| INSTALLATION SPECIFICATIONS | | | |
| Protection class | | NEMA 4X | |
| Operating temperature range | [°F/°C] | -13 to +140 / -25 to +60 | |
| De-rating start temperature | [°F/°C] | 113/45 or above | |
| Storage temperature range | [°F/°C] | -13 to +167 / -25 to +75 | |
| Relative humidity | [%] | 0 to 95 | |
| Altitude | [ft/m] | 9843/3000 MAX | |
| Typical noise emission | [dBA] | < 30 | |
| Over voltage category | | IV (electric supply side), II (PV side) | |
| GENERAL | | | |
| Dimensions (W × H × D) | [in/mm] | 33.1 × 15.7 × 5.7/840 × 400 × 145 | |
| Weight | [lb/Kg] | 75/34 | |
| Cooling | | Natural convection | |
| Topology | | Transformerless | |
| Communication interfaces | | RS485, CAN, WIFI/Dry Contact | |
| Warranty | | 12 years standard, extendable to 15 years | |

■ Q.SAVE D10.0/15.0/20.0SX

| | | Q.SAVE D10.0SX | Q.SAVE D15.0SX | Q.SAVE D20.0SX |
|------------------------------------|-------|---------------------|---|---------------------|
| MODEL | | | | |
| Battery type | | | 100Ah Lithium (LFP) | |
| Component | | BMS-G2 + 2*BAT50-G2 | BMS-G2 + 3*BAT50-G2 | BMS-G2 + 4*BAT50-G2 |
| NOMINAL CHARACTER | | | | |
| Voltage | [V] | 102.4 | 153.6 | 204.8 |
| Operating voltage range | [V] | 90 to 116 | 135 to 174 | 180 to 232 |
| Total energy | [kWh] | 10 | 15 | 20 |
| Usable energy* | [kWh] | 9 | 13.5 | 18 |
| Battery roundtrip efficiency** | [%] | | 95 | |
| Maximum power | [kW] | 5.5 | 8.3 | 11.1 |
| Maximum charge / discharge current | [A] | | 54 | |
| C rating | | | 0.54 C | |
| Cycle life (90% DOD) | | | 6000 cycles | |
| Warranty | | | 12 years standard, extendable to 15 years | |

* Test Conditions: 90% DOD, 0.2C charge & discharge at +25°C.

** Maximum Charge / Discharge power may be variant with different inverter models.

| | | | | |
|--------------------------------------|-----------|---|--|--|
| INSTALLATION SPECIFICATIONS | | | | |
| Charge / Discharge temperature range | [°F / °C] | Charge: 32 to 127.4 / 0 to 53, Discharge: 14 to 127.4 / -10 to 53 | | |
| Storage temperature range | [°F / °C] | 3 months: 4 to 122 / -20 to 50, 1 year: 32 to 104 / 0 to 40 | | |
| Relative humidity | [%] | 0 to 100 | | |
| Altitude | [ft / m] | 9843 / 3000 MAX | | |
| Protection class | | NEMA 4X | | |
| STANDARD | | | | |
| Certification | | UN38.3, UL1642, UL1973, UL9540, UL9540A | | |
| Hazardous materials classification | | Class 9 | | |

| | | | | |
|-----------------------------------|-----------|--|--|--|
| GENERAL | | | | |
| Cooling | | Natural convection | | |
| Dimensions (W × H × D) - BMS-G2 | [in / mm] | 33.5 × 5.2 × 5.8 / 850 × 133 × 148 | | |
| Dimensions (W × H × D) - BAT50-G2 | [in / mm] | 33.5 × 23.6 × 5.8 / 850 × 600 × 148 | 33.5 × 35.4 × 5.8 / 850 × 900 × 148 | 33.5 × 47.2 × 5.8 / 850 × 1200 × 148 |
| Dimensions (W × H × D) - Base | [in / mm] | 33.5 × 2.2 × 5.8 / 850 × 55 × 148 | | |
| Weight | [lb / kg] | BMS-G2: 22 / 10 + (2) BAT50-G2: 238 / 108 | BMS-G2: 22 / 10 + (3) BAT50-G2: 357 / 162 | BMS-G2: 22 / 10 + (4) BAT50-G2: 476 / 216 |

■ Q.HOME HUB 200SX

| | | | | |
|--|-----------|---|--|--|
| GRID INPUT | | | | |
| Nominal AC input voltage / Nominal AC frequency | [V / Hz] | 120 / 240, 60 | | |
| Maximum AC input current | [A] | 160 | | |
| OUTPUT TO MAIN PANEL IN GRID TIED OPERATION | | | | |
| Nominal AC output voltage | [V] | 120 / 240 | | |
| Maximum AC input current | [A] | 160 | | |
| OUTPUT IN BACKUP OPERATION | | | | |
| Nominal AC output voltage | [V] | 120 / 240 | | |
| Imbalance compensation in backup operation | [VA] | 5000 | | |
| Split phase imbalance output current | [A] | 41.7 | | |
| Grid-loss switchover time | [ms] | ~200 (single Q.VOLT inverter) / ~600 (parallel stacked & AC-coupled configurations) | | |
| GENERAL | | | | |
| Dimensions (H × W × D) | [in / mm] | 27.8 × 17.7 × 5.9 / 706 × 450 × 15 | | |
| Weight | [lb / Kg] | 69.4 / 31.5 | | |
| Energy meter accuracy | [%] | 1 | | |
| Communication interfaces | | RS485, CAN, Dry Contact | | |
| Cooling | | Fan | | |
| Warranty | | 12 years standard, extendable to 15 years | | |
| STANDARD | | | | |
| Safety | | UL1741, CSA 22.2 NO.107 | | |
| Emissions | | FCC part 15 Class B | | |
| INSTALLATION SPECIFICATIONS | | | | |
| Altitude | [ft / m] | 9843 / 3000 MAX | | |
| Operating temperature range | [°F / °C] | -13 to +140 / -25 to +60 | | |
| Protection class | | NEMA 3R | | |
| Typical noise emission | [dBA] | < 50 | | |

■ Qualifications and Certificates



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS America Inc. 400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL hqc-inquiry@qcells.com | WEB www.qcells.com

qcells